

Zebra reserves the right to make changes to any product to improve reliability, function, or design.

Zebra does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

No license is granted, either expressly or by implication, estoppel, or otherwise under any patent right or patent, covering or relating to any combination, system, apparatus, machine, material, method, or process in which Zebra products might be used. An implied license exists only for equipment, circuits, and subsystems contained in Zebra products.

Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. The Symbol logo is a registered trademark of Symbol Technologies, Inc., a Zebra Technologies company.

Warranty

For the complete Zebra hardware product warranty statement, go to: <http://www.zebra.com/warranty>.

Refer to the CA50 Client/UCA Server Developer Guide (p/n 72E-93914-xx) for detailed product information. For the latest guide, visit: <http://www.zebra.com/support>.



Zebra Technologies Corporation
Lincolnshire, IL U.S.A.
<http://www.zebra.com>

Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. The Symbol logo is a registered trademark of Symbol Technologies, Inc., a Zebra Technologies company.

© 2015 Symbol Technologies, Inc.





72-102668-02 Revision A — February 2015

Wall Mount Bracket Kit

Installation Guide

for CHS5000-8000CR & SAC5000-8000CR Cradles

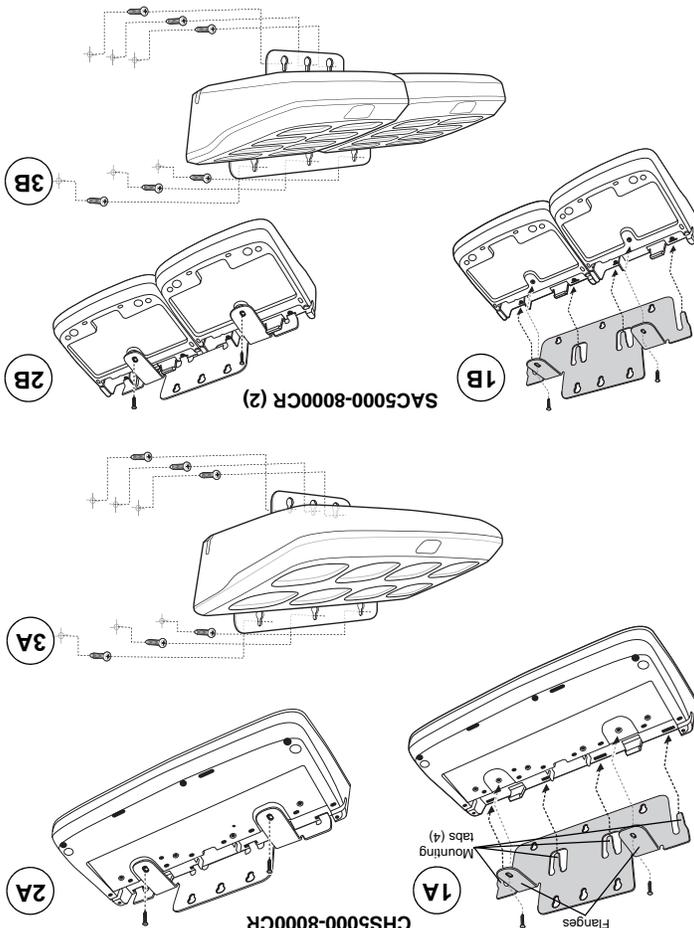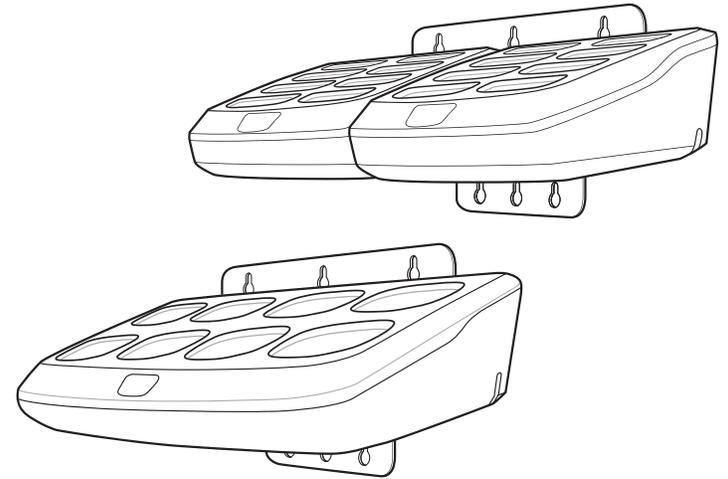

- Follow the steps below to mount one CHS5000-8000CR (eight-slot) CA50 charger, or two SAC5000-8000CR (eight-slot) battery chargers (as pictured).
- Slide the four bracket mounting tabs into the receptacles on the bottom of the cradle as shown in diagram 1A. Ensure the screw holes in the bracket flanges align with the screw holes in the cradle.
 - NOTE** When mounting two eight-slot battery chargers, slide two bracket mounting tabs into each battery charger (diagram 1B).
 - Screw two .5" Phillips screws (supplied) into the two bracket flanges and tighten until the cradle is securely attached to the bracket (diagram 2A).
 - NOTE** When mounting two eight-slot battery chargers, use one .5" Phillips screw in each flange and tighten one flange to each cradle (diagram 2B).
 - Use six screws to mount the bracket to a wall (diagrams 3A and 3B). Ensure to use additional wall mounting hardware, as needed, for safe mounting to the wall type.

Mounting Instructions

- WARNING!** Use the screws supplied in this kit to attach the cradle(s) to the mounting bracket only. The screws are not intended for mounting the bracket on a wall. For safety and stability, it is recommended that you use the appropriate wall mounting hardware for installation. For safe mounting, it is essential to use wall anchors appropriate to the wall type (i.e. plaster, drywall, concrete, etc.). Mount to wood studs whenever possible.
- Use the screws supplied in this kit to attach the cradle(s) to the mounting bracket only. The screws are not intended for mounting the bracket on a wall.
- For safety and stability, it is recommended that you use the appropriate wall mounting hardware for installation. For safe mounting, it is essential to use wall anchors appropriate to the wall type (i.e. plaster, drywall, concrete, etc.). Mount to wood studs whenever possible.
- Follow the steps below to mount one CHS5000-8000CR (eight-slot) CA50 charger, or two SAC5000-8000CR (eight-slot) battery chargers (as pictured).
- Slide the four bracket mounting tabs into the receptacles on the bottom of the cradle as shown in diagram 1A. Ensure the screw holes in the bracket flanges align with the screw holes in the cradle.
 - NOTE** When mounting two eight-slot battery chargers, slide two bracket mounting tabs into each battery charger (diagram 1B).
 - Screw two .5" Phillips screws (supplied) into the two bracket flanges and tighten until the cradle is securely attached to the bracket (diagram 2A).
 - NOTE** When mounting two eight-slot battery chargers, use one .5" Phillips screw in each flange and tighten one flange to each cradle (diagram 2B).
 - Use six screws to mount the bracket to a wall (diagrams 3A and 3B). Ensure to use additional wall mounting hardware, as needed, for safe mounting to the wall type.

Included Hardware

- KT-102375-01R Mounting Bracket
- Two black .5" Phillips round head, thread cutting screws.

Introduction

This guide provides instructions for mounting the KT-102375-01R bracket for use with one CHS5000-8000CR (eight-slot) CA50 charger, or two SAC5000-8000CR (eight-slot) battery chargers.

NOTE Refer to the CA50 Client/UCA Server Developer Guide (p/n 72E-93914-xx) for detailed product information.