

## Installation




CAUTION: Do not use any tool for battery cover removal. Puncturing the battery or seal may cause a hazardous condition and a potential risk of injury.

Remove the battery cover and store in a safe place.



Using a plier, remove the two gaskets.

Align the payment Z back to the battery well.

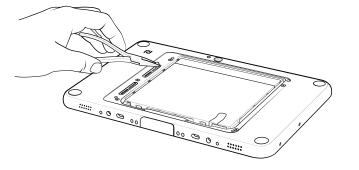

Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA www.zebra.com

MN-004845-01EN Rev. A - November 28, 2023


Payment Z Back

Verifone

for ET5x

Installation Guide


ZEBRA and the stylized Zebra head are trademarks of Zebra o., registered in many jurisdictions worldwide All other trademarks are the property of their respective owners. © 2023 Zebra Technologies Corp. and/or its affiliates. All rights reserved




Using a cross head or Phillips screwdriver, secure the payment Z back to the device using three M2 11 mm and two M2 4 mm screws.

Place the payment device into the bottom tray.

Align the top cover with the top locking mechanism, and lock it in place.

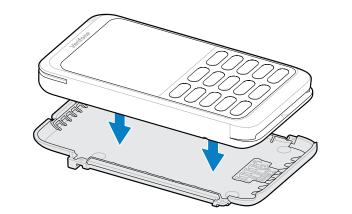




## Press down the top cover to clip it in place.


Using a cross head or Phillips screwdriver, secure the payment device using four M1.6 5 mm screws.

Insert the payment device into the Z back.

Swipe a card with the magnetic stripe facing the tablet.



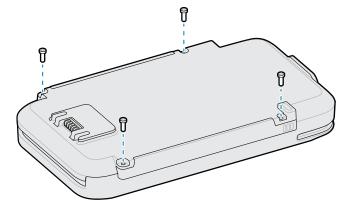

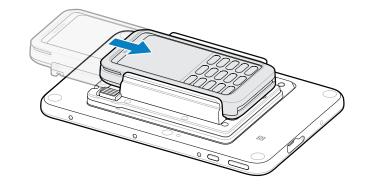

Insert a card with the chip facing away from the tablet.

To remove the payment device, press the release latch and slide the payment device out of the Z back.

