


ET80/ET85 Power/Vehicle/Office Dock Quick Start Guide

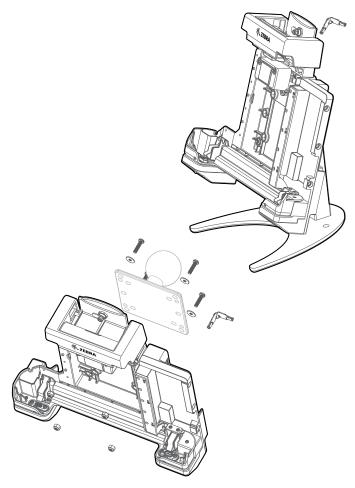


Use only with ET80 and ET85.

Power Only Dock	Provides tablet charging only.
CRD-ET8X-PWRDK1-01	Includes four 10-32 nuts, four screws, four washers, and two keys.
	Supports VESA 100 mm x 100 mm, 100 mm x 50 mm, and 75 mm x 75 mm.
	Mount not included.
Vehicle Dock	Provides tablet charging, USB
CRD-ET8X-VEHDK1-01	communication, and Ethernet communication.
	Includes four 10-32 nuts, four screws, four washers, and two keys.
	Supports VESA 100 mm x 100 mm, 100 mm x 50 mm, and 75 mm x 75 mm.
	Mount not included.
Office Dock	Provides tablet charging, USB
CRD-ET8X-OFFDK1-01	communication, Ethernet communication, and HDMI ports.
	Includes two keys and stand.

Operating Temperature	-20 °C to 40 °C (-4 °F to 104 °F)
Office Dock, AC adapter, 9 port PEM	
Operating Temperature	-20 °C to 60 °C (-4 °F to 150 °F)
Vehicle Dock, 7 port PEM	

Cable Routing


Use the indicated cable tie slots for cable routing to prevent interference from the keyboard handle.



Wall Mounting

Mount the ET80/ET85 Power Only or Vehicle docks on a wall as shown using the following materials (not included with dock).

- Rear standoffs 6 mm (1/4 in.) minimum thickness. This allows the locking lever to fully open.
- Front washers 15 mm (5/8 in.) minimum outside diameter.
- Screws #8 x 3 in. Phillips pan head wood screws.
- Hole pattern four 5.6 mm diameter holes spaced 100 mm x 100 mm apart.

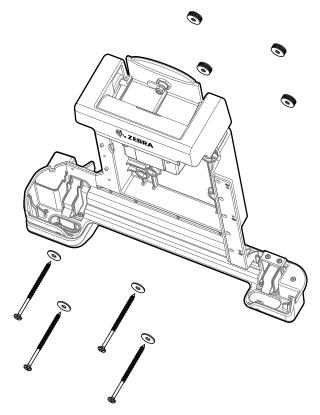





ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. © 2021 Zebra Technologies Corp. and/or its affiliates. All rights reserved. | zebra.com

Inserting the Tablet

1. If previously installed, ensure the keyboard and handle are closed.



- 2. Insert the bottom of the tablet into the bottom of the dock (1), aligning the charging contacts on the tablet with the connector pins on the dock.
- 3. Rotate the top of the tablet towards the top of the dock (2).

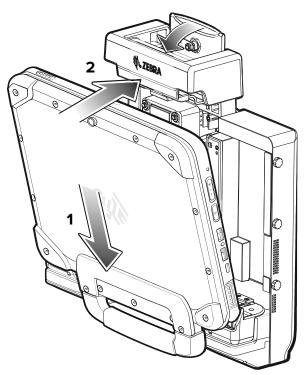

4. Use your thumb to push the tablet into the dock, then push the lever down to secure the tablet.

